


High Accuracy CNC Coordinate Measuring Machine **STRATO-Apex Series**

Catalog No. E16001

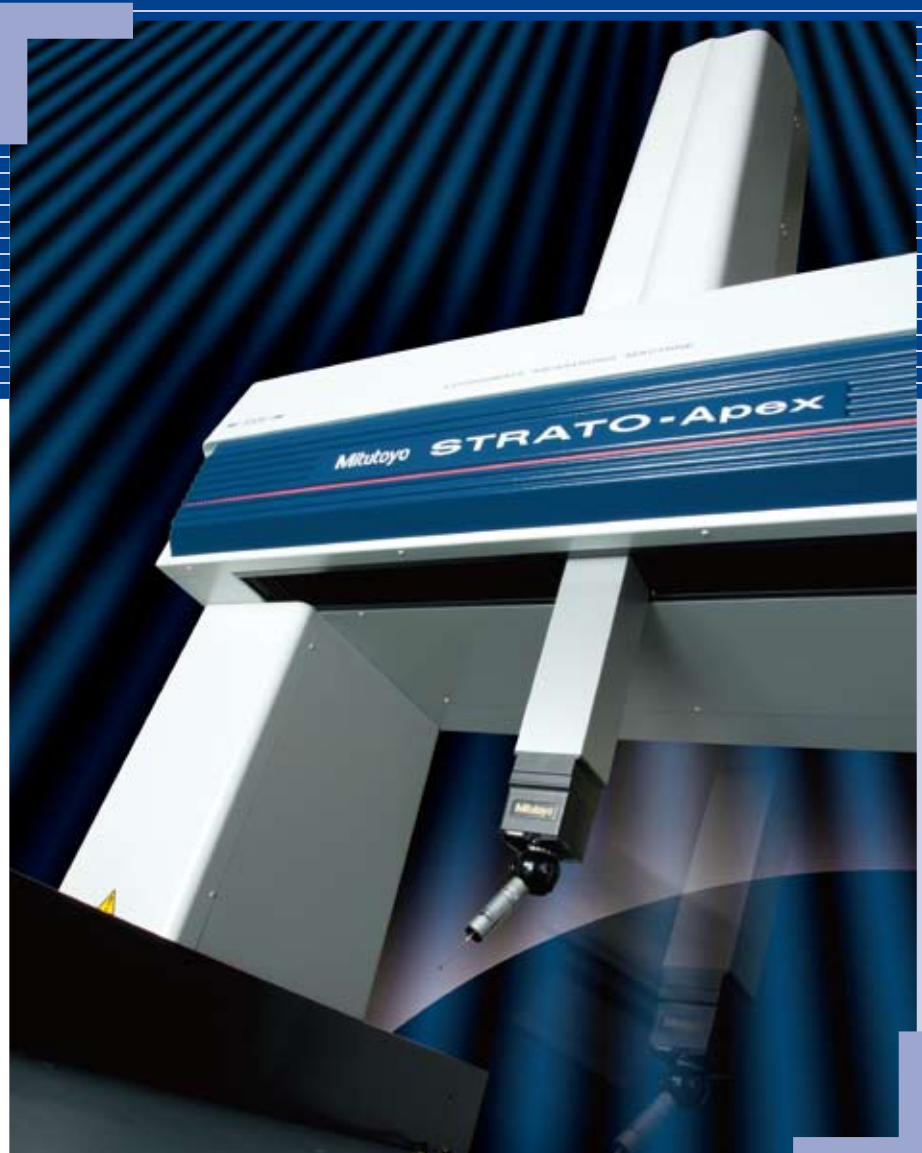

A state-of-the-art CNC coordinate measuring machine that offers a rare blend of high-speed operation combined with highly accurate measurement

Mitutoyo

STRATO-Apex Series: A long-awaited, state-of-the-art CNC accuracy combined with high-speed operation

The high drive speed and acceleration guarantee top scanning performance

Improved machine rigidity

- High speed and accuracy in measurement is ensured by a redesign of the machine body that has improved rigidity of the structure, and by a remodeled guide mechanism

Newly developed, built-in, high-performance controller

- Uses a digital servo system that processes all control loops for position, speed, and current as digital signals.
- The digital servo system offers the following benefits:
 - (1) Little drift or deterioration with time
 - (2) Wide dynamic range
 - (3) Easy implementation of various types of control algorithm

Scanning measurement technology

- High-performance scanning measurement has been achieved through the improved structural rigidity and incorporation of a newly developed compensation technology
Maximum permissible scanning probe error: $MPE_{THP} = 1.8 \mu\text{m}$ (derived from scanning master ball during setup)
Maximum permissible scanning time $MPT_{\pm HP} = 45 \text{ sec}$ (to achieve $1.8 \mu\text{m}$ error)
(cf. Existing FALCIO Series: $MPE_{THP} = 2.2 \mu\text{m}$)
 $MPT_{\pm HP} = 110 \text{ sec.}$)

*Probe used: SP25M



Mitutoyo

coordinate measuring machine that achieves high

in a machine that also offers high-accuracy measuring in the 1 μm class

Internal heat generation minimized

- The controller is positioned outside the main unit, thereby eliminating the effect of the generated heat on the main unit.
- Compact layout has been achieved, resulting in a small footprint, even with the externally positioned controller.




Ultra-high precision glass scales

- An ultra-high precision crystallized glass scale which has practically no thermal expansion (coefficient of linear expansion $0.01 \times 10^{-5}/^{\circ}\text{C}$) is combined with a high-performance reflective linear encoder with resolution of $2/100 \mu\text{m}$ to create the ultra-high accuracy measurement unit installed on each axis of STRATO-Apex. This is basically the same unit as used in the LEGEX Series of ultra-high accuracy CNC coordinate measuring machines.
- A unique securing method used for the scales minimizes the hysteresis error that can result from the difference in the coefficients of linear expansion between the installation plane and scale.




Vibration-damping unit included as a standard accessory

- Vibration of the floor where the unit is installed shows up as measurement value variations. The STRATO-Apex Series comes equipped with a vibration-damping unit that uses auto-leveling air springs. The vibration-damping unit not only prevents floor vibrations from reaching the main unit, but also has a function that uses a sensor to detect load changes caused by movements of the individual axes and placement of a workpiece and quickly restores the main unit to horizontal orientation.

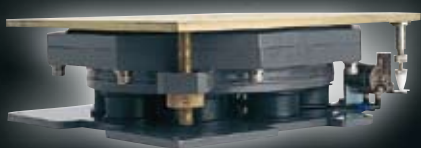

▲Vibration-damping unit with auto-leveling air springs

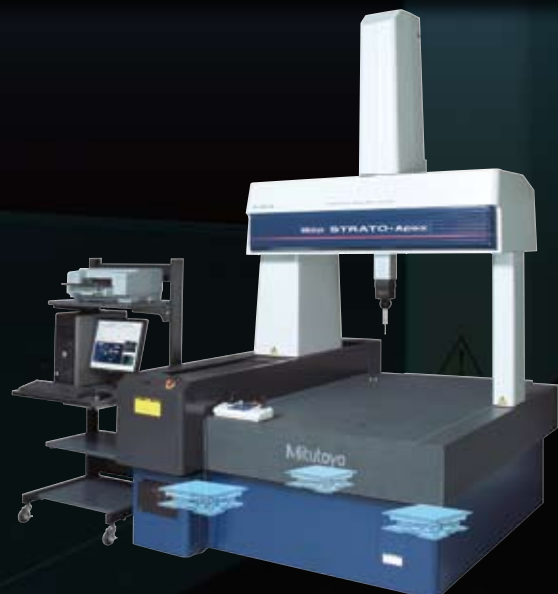

▲Vibration-damping unit positioning

Providing the Highest Speed and Accuracy in Moving-Br Integration of Key Measurement Technologies



STRATO-Apex 776



STRATO-Apex 9106

Specifications

Item		STRATO-Apex 776	STRATO-Apex 7106	STRATO-Apex 9106	STRATO-Apex 9166
Measuring range	X	705 mm		905 mm	
	Y	705 mm	1005 mm	1605 mm	
	Z	605 mm			
Guide method		Air bearings on all axes (static pressure air bearings)			
Drive speed	CNC mode	Drive speed: From 8 to 300 mm/s for each axis (maximum combined speed: 519 mm/s)			
		Measuring Speed 1 – 3 mm/s			
	J/S mode	Drive Speed 0 – 80 mm/s			
		Measuring Speed 0 – 3 mm/s			
		Fine-positioning Speed 0.05 mm/s			
Drive acceleration		1,500 mm/s ² for each axis (maximum combined acceleration: 2,598 mm/s ²)			
Measuring method		Linear encoder			
Resolution		0.00002 mm			
Work table	Material	Granite			
	Size (table surface)	880 x 1420 mm	880 x 1720 mm	1080 x 1720 mm	1080 x 2320 mm
	Tapped inserts	M8 x 1.25 mm			
Workpiece	Maximum height	770 mm			
	Maximum mass	800 kg	1000 kg	1200 kg	1500 kg
Machine mass (includes the vibration-damping platform and controller, but not workpiece)		1895 kg	2180 kg	2410 kg	3085 kg
Power supply specifications (including the probe option interface)		Power supply voltage: AC100-120/200-240 V ± 10%; power supply capacity: 700 VA (of which 170 VA is used for the probe option interface)			
Air supply	Pressure	0.4 MPa			
	Consumption	60 L/min under normal conditions (air source: At least 120 L/min)			
Guaranteed accuracy temperature environment	Temperature range		19 – 21 °C		
	Temperature change	Per hour	1.0 K		
		Per 24 hours	2.0 K		
Temperature gradient		vertical/horizontal 1.0 K/m			

Maximum permissible error

unit: μm

	Probe used	Maximum permissible error
ISO 10360-2: 2001 (JIS B 7440-2: 2003)	SP25M/MPP-310Q	MPE _E =0.9+2.5 L/1000
	TP200	MPE _E =1.4+2.5 L/1000 (for model 776/7106) MPE _E =1.5+2.5 L/1000 (for model 9106/9166)

Note: This machine incorporates a main unit Startup system (relocation detection system), which disable operation when an unexpected vibration is applied or the machine is relocated. Be sure to contact your nearest Mitutoyo Sales Office prior to relocating this machine after initial installation.

Probing error

unit: μm

	Probe used	Maximum permissible probing error
ISO 10360-2: 2001 (JIS B 7440-2: 2003)	SP25M	MPE _P =0.9
	MPP-310Q	MPE _P =0.9
	TP200	MPE _P =1.8

Scanning accuracy specification

(high-density scanning measurement using a preset route)


unit: μm

	Probe used	Maximum permissible scanning probe error (Maximum permissible scanning test time) [sec]
ISO 10360-4: 2001 (JIS B 7440-4: 2003)	SP25M	MPE _{THP} =1.8 (MPT _{THP} =45)
	MPP-310Q	MPE _{THP} =2.0 (MPT _{THP} =70)

Bridge Type Coordinate Measuring Machines


■ Dimensions

unit: mm

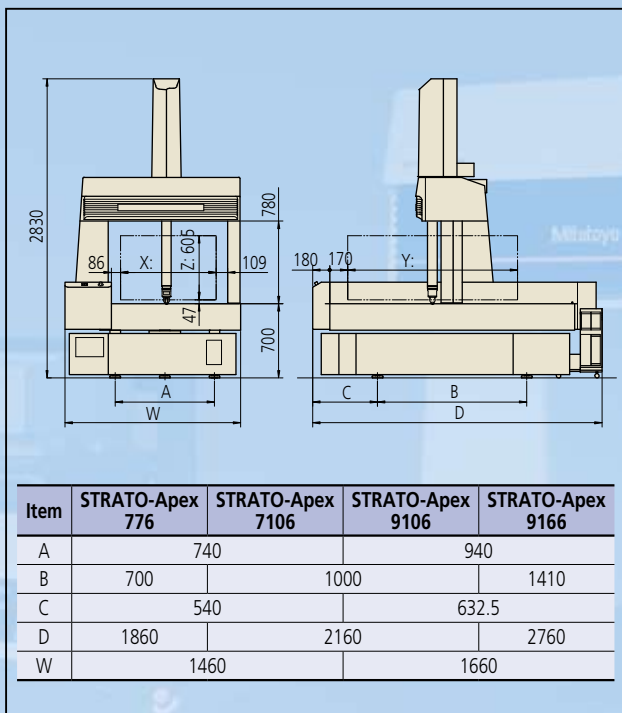


■ Installation floor space

unit: mm

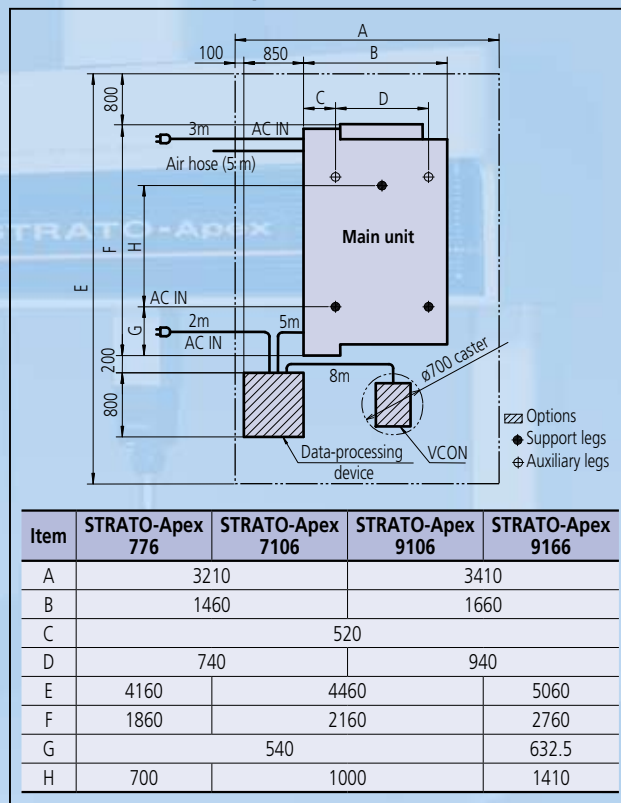


■ Tapped insert positions in the table surface

unit: mm

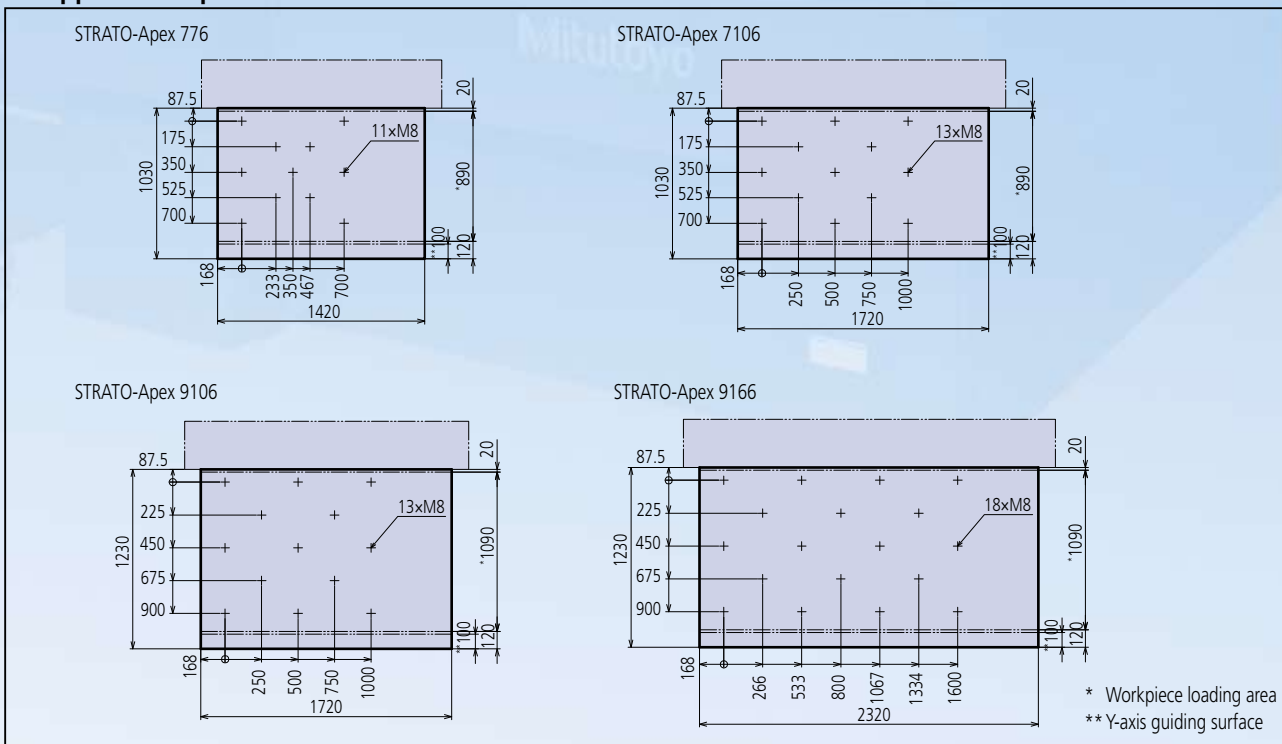

Software options handle all kinds of measurement




CAT1000S (freeform surface evaluation program)

Checks and compares the workpiece with the CAD data containing freeform surfaces and directly outputs the results in the form of CAD data in various formats. Software to directly convert from/to various types of CAD data is available as an option.



GEOPAK (high-functionality general-purpose measurement program)

This module is the heart of the MCOSSMOS software system and is used to measure and analyze geometric elements. All the functions are provided by icons or pull-down menus, so even novices can promptly select desired functions. Its main features include easier viewing of measuring procedures and results such as realtime graphic display of measurement results and a function for direct call-up of elements from results graphics.



CAT1000P (off-line teaching program)


This module enables the user to use CAD data and on-screen simulation to create parts programs for making automated measurements (off-line teaching). This module allows the user to begin creating a parts program as soon as the design data has been finalized, shortening the entire process.

SurfaceMeasure606 (non-contact laser probe)

A lightweight, high-performance, non-contact probe developed for CNC coordinate measuring machines. Powder spray-less measurement has been achieved through automatic setting of appropriate laser intensity and camera sensitivity according to environment or material, providing a simpler and more comfortable laser scanning environment.




SurfaceMeasure606




MSURF (non-contact laser measurement and evaluation program)

MSURF-S is used for obtaining measured point cloud data with the SurfaceMeasure (non-contact laser probe), while MSURF-I is used for comparing this data with the master model data, and for making dimensional measurements. Furthermore, MSURF-G for offline teaching allows the user to create a measurement macro even without the actual workpiece, improving the measuring machine's uptime.




SCANPAK (contour measurement program)

Software for scanning and evaluating workpiece contours (2D). Evaluates contour tolerance between measurement data and design data, and performs various types of element and inter-element calculations based on a desired range of measurement data specified by the user.

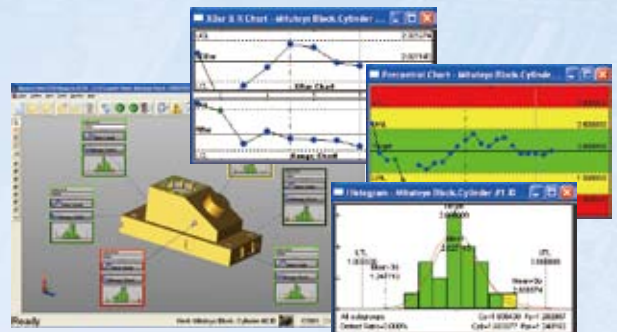

MeasurLink STATMeasure Plus (statistical-processing and process-controlling program)

Performs various types of statistical computations using measurement results. In addition, by displaying a control diagram on a real-time basis, this program allows defects that may occur in the future (e.g., wear or damage to cutting tools) to be discovered early on. This program can also be linked to a higher-level network environment to build a central control system.



GEARPAK (gear evaluation program)
For evaluating the most types of involute gears.



MPP-310Q (scanning probe)

A probe that collects coordinate values (point cloud data) at high accuracy by moving at speeds of up to of 120 mm/s while in contact with the workpiece. Because MPP-310Q can also be used with the rotary table (MRT320) for synchronous scanning, it is effective for measuring gears, blades, ball screws, cylindrical cams, etc.




MRT320



MPP-10 (probe for effective screw depth measurement)

The probe that made it possible for a coordinate measuring machine to measure effective screw depth for the first time. The introduction of the auto probe changing system allows normal dimensional measurements as well as effective screw depth measurements to be made automatically.



SP25M (compact high-accuracy scanning probe)

This is a compact, high-accuracy, multi-function scanning probe with a 25-mm outside diameter that makes scanning measurements, high-accuracy point measurements, and centripetal point measurements (optional function). The SP25M is used with the PH10MQ/10M auto probe head to provide a high degree of measurement freedom.



QVP (vision probe)

This probe automatically detects edges from image data of the workpiece magnified by a CCD camera. It is extremely useful for measuring microfabricated products that cannot be measured using a contact-type probe and soft objects that cannot be subjected to any measurement force. The QVP can also be used for measuring height based on autofocus.



UMAP-CMM

This head makes it possible to use an ultra-small stylus (0.1- or 0.3-mm diameter). It can be installed on the PH10MQ to measure the shape and dimensions of microfabricated products from multiple directions.





NC-Auto measure

This program generates CAD data from NC data.




Solid Model Developer

This program generates CAD data from data measured using MCOSMOS.

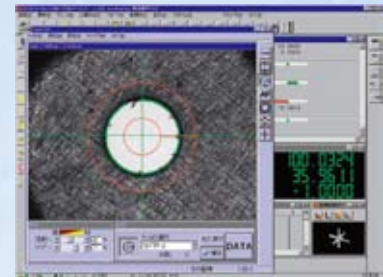

VISIONPAK (vision measurement program)

This program controls QVP and performs various computational analyses on captured images

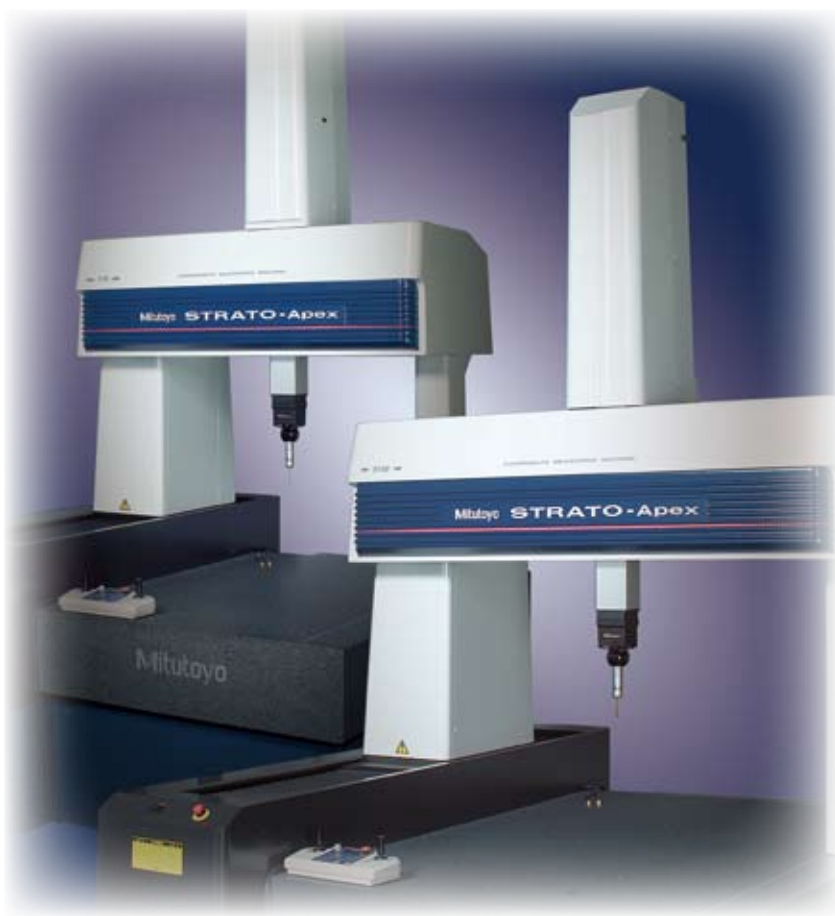

Specifications are subject to change without notice.

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this pamphlet, as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs, dimensions and weights. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. Only quotations submitted by ourselves may be regarded as definitive.

Our products are classed as regulated items under Japanese Foreign Exchange and Foreign Trade Law. Please consult us in advance if you wish to export our products to any other country. If the purchased product is exported, even though it is not a regulated item (Catch-All controls item), the customer service available for that product may be affected. If you have any questions, please consult your local Mitutoyo sales office.

Export permission by the Japanese government may be required for exporting our products according to the Foreign Exchange and Foreign Trade Law. Please consult our sales office near you before you export our products or you offer technical information to a nonresident.

- Coordinate Measuring Machines
- Vision Measuring Systems
- Form Measurement
- Optical Measuring
- Sensor Systems
- Test Equipment and Seismometers
- Digital Scale and DRO Systems
- Small Tool Instruments and Data Management

Mitutoyo Corporation

20-1, Sakado 1-Chome,
Takatsu-ku, Kawasaki-shi,
Kanagawa 213-8533, Japan
T +81 (0) 44 813-8230
F +81 (0) 44 813-8231
<http://www.mitutoyo.co.jp>

Mitutoyo